

Como



Refreshing Beauty

Como

REFRESHING BEAUTY

Como

-REFRESHING BEAUTY-

Inspired by the crystal-clear glacial waters of Lake Como, this marble and stone collection of tiles recreate the scenery of sun-speckled water rippling over solid rock. The refreshing coolness of this tile collection brings a striking balance of nature and urbanity to your interior surroundings.



PCM01 CLARA
Polished - 60x60cm . 30x60cm
Matt - 60x60cm



PCM02 CELIA
Polished - 60x60cm . 30x60cm




PCM03 CRISTIN
Polished - 60x60cm . 30x60cm
Matt - 60x60cm



PCM04 COLBIE
Polished - 60x60cm . 30x60cm
Matt - 60x60cm



PCM05 CASSIE
Polished - 60x60cm . 30x60cm
Matt - 60x60cm

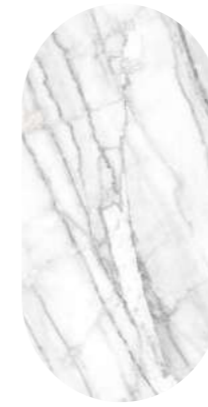

PCM06 CAPRI
Polished - 60x60cm



PCM07 CALISTA
Polished - 60x60cm



PCM08 CLEO
Polished - 60x60cm
Matt - 60x60cm



PCM09 CAYLEE
Polished - 60x60cm



CLARA
PCM01
Polished - 60x60cm . 30x60cm
Matt - 60x60cm



CELIA
PCM02
Polished - 60x60cm . 30x60cm

V2



CRISTIN
PCM03
Polished - 60x60cm . 30x60cm
Matt - 60x60cm

V3



COLBIE
PCM04
Polished - 60x60cm . 30x60cm
Matt - 60x60cm

V3



CASSIE

PCM05


Polished - 60x60cm . 30x60cm

Matt - 60x60cm

V2



CAPRI
PCM06
Polished - 60x60cm

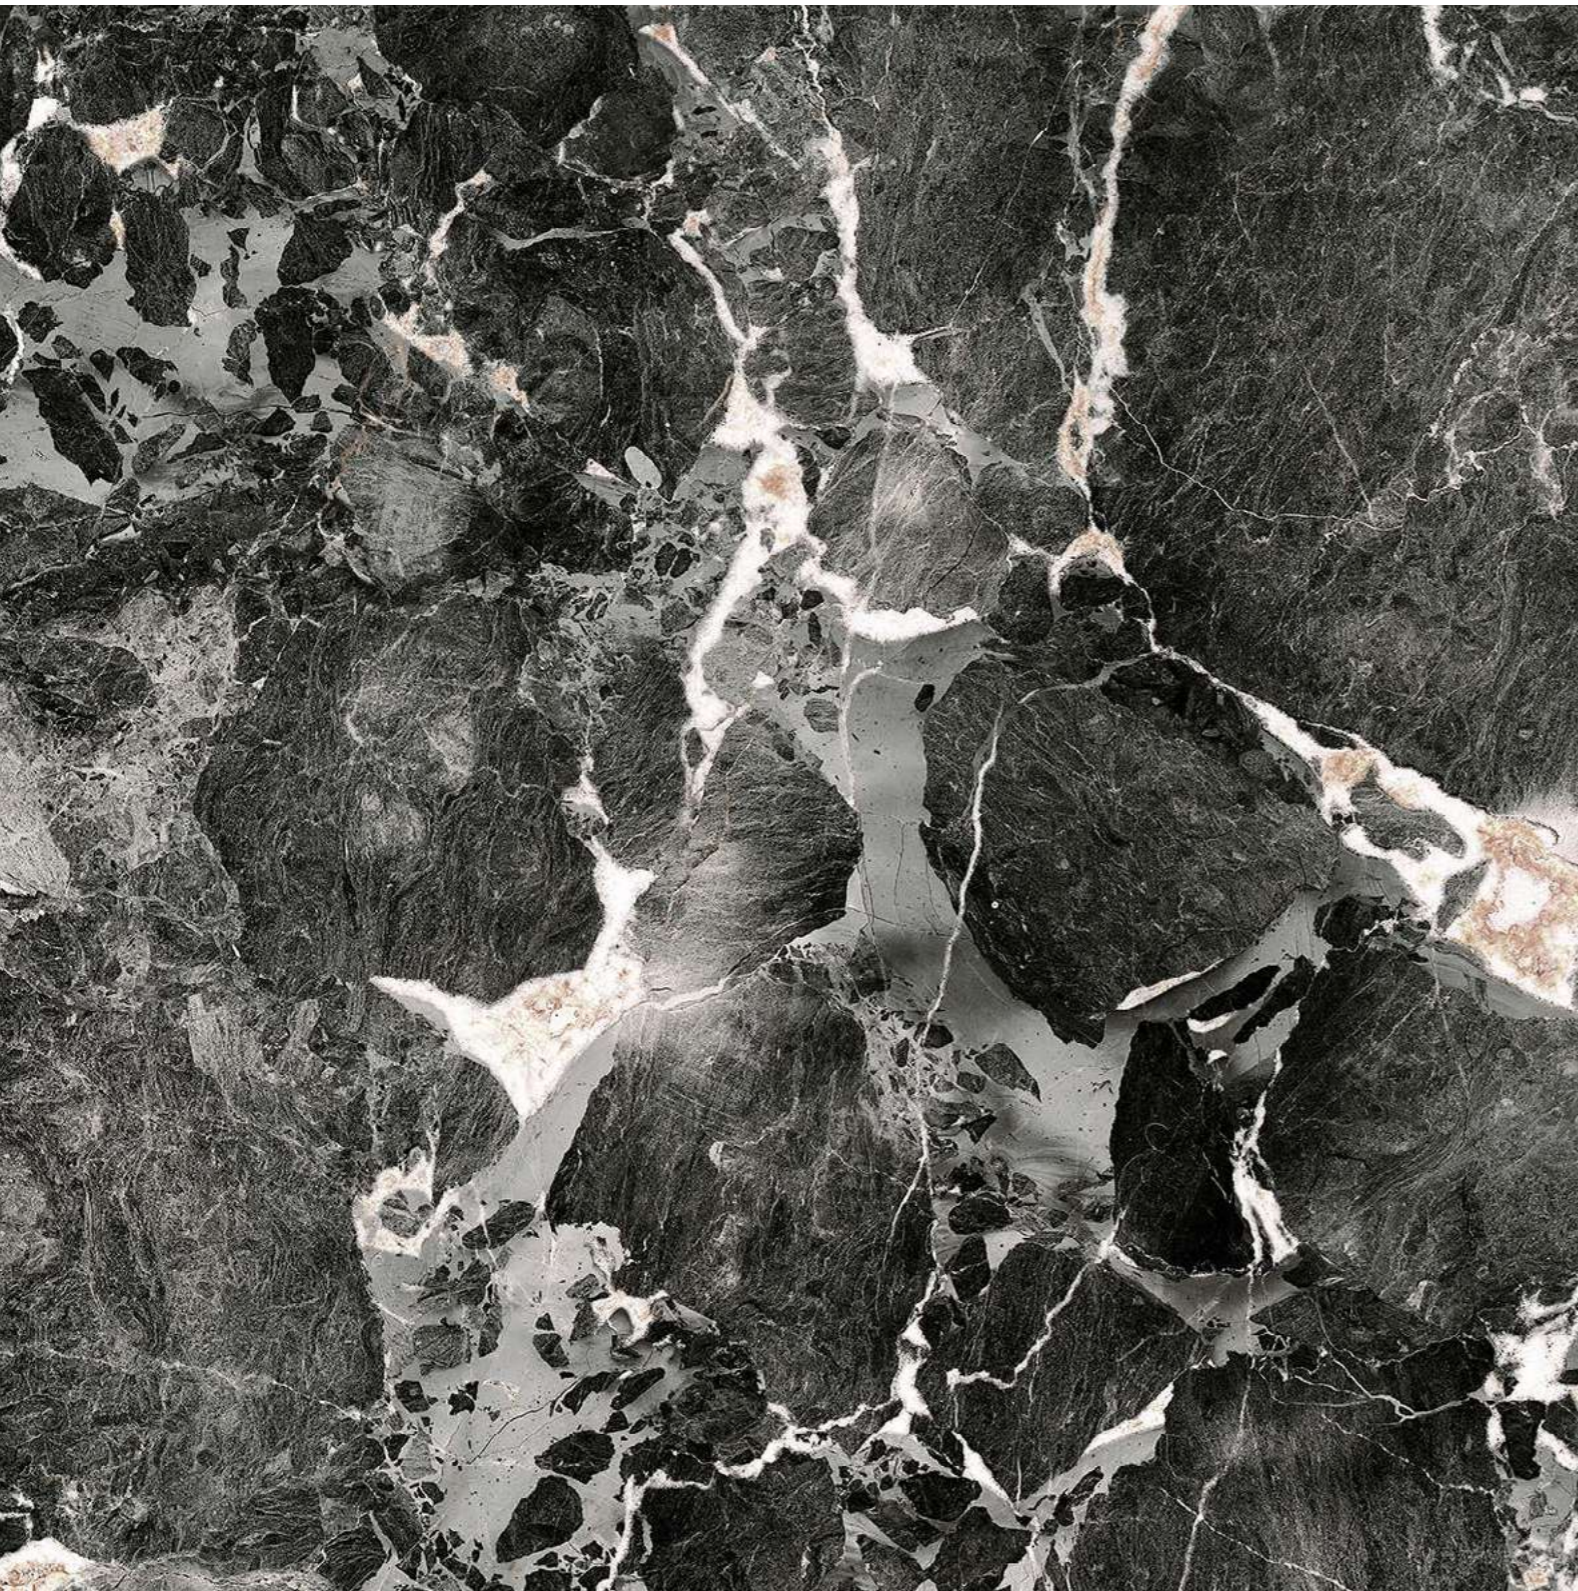


CALISTA
PCM07
Polished - 60x60cm

V3



CLEO
PCM08
Polished - 60x60cm
Matt - 60x60cm

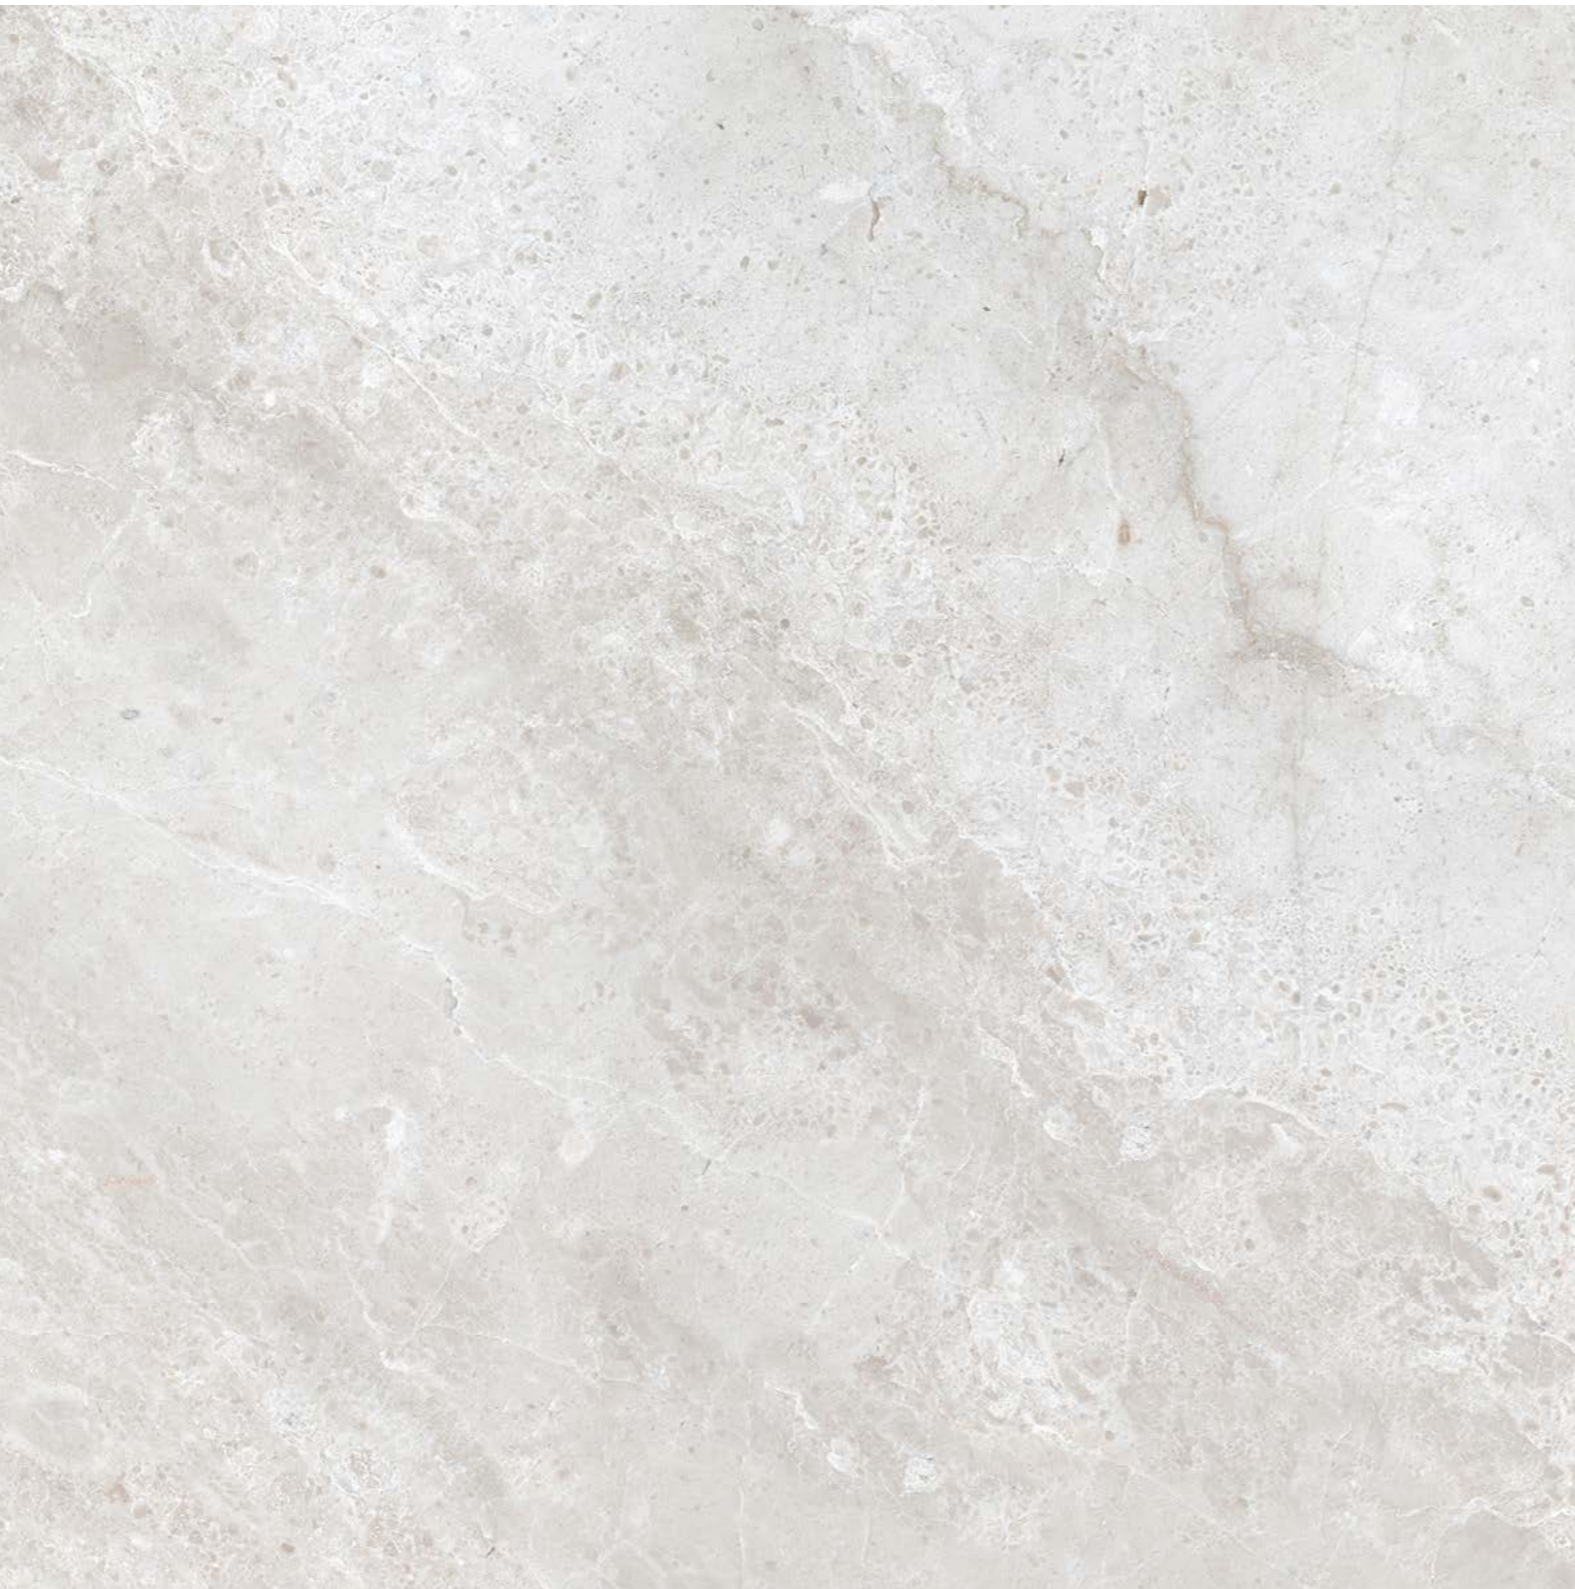

CAYLEE
PCM09
Polished - 60x60cm

V2

PORTINO TECHNICAL SPECIFICATION

DESCRIPTION	STANDARD TEST	MEASUREMENT UNIT	PORCELAIN (Group Bla)			
			mm	Rectified	mm	Non Rectified
Length & Width	MS ISO 10545-2	mm	±1.0	±0.30%	±2.0	±0.60%
Thickness	MS ISO 10545-2	mm	±0.5	±5.00%	±0.5	±5.00%
Sides Straightness	MS ISO 10545-2	mm	±0.8	±0.30%	±1.5	±0.50%
Rectangularity	MS ISO 10545-2	mm	±1.5	±0.30%	±2.0	±0.50%
Flatness : a) Centre curvature	MS ISO 10545-2	mm	±1.8	±0.40%	±2.0	±0.50%
b) Edge curvature	MS ISO 10545-2	mm	±1.8	±0.40%	±2.0	±0.50%
c) Warpage	MS ISO 10545-2	mm	±1.8	±0.40%	±2.0	±0.50%
Surface Quality	MS ISO 10545-2	One Major Area of Tiles	Min. 95% free from defects			
Water Absorption	MS ISO 10545-3	Mass	Ev ≤ 0.5%			
Breaking Strength : a) Thickness ≥ 7.5mm	MS ISO 10545-4	N	Not less than 1300N			
b) Thickness < 7.5mm	MS ISO 10545-4	N	Not less than 700N			
Modulus of Rupture : a) Thickness ≥ 7.5mm	MS ISO 10545-4	N/mm ²	Minimum 35			
b) Thickness < 7.5mm	MS ISO 10545-4	N/mm ²	Individual Minimum 32			
Abrasion Resistance Surfaces Abrasion for glazed tiles	MS ISO 10545-7	Visual Check	≥ PEI 3 (Dependent on product type)*			
Crazing Test (glazed tiles)	MS ISO 10545-11	Visual Check	Required			
Frost Resistance	MS ISO 10545-12	Visual Check	Required			
Chemical Resistance a) Low concentrations	MS ISO 10545-13	Visual Check	Manuf. To State			
b) Household chemicals and swimming pool salts	MS ISO 10545-13	Visual Check	Minimum B			
Stain Resistance For glazed tiles	MS ISO 10545-14	Visual Check	Minimum class 3			
Slip Resistance	AS/NZS 4586 App.A	Visual Check	Wet Pendulum ≤ P2 (Dependent on product type)*			

Each different tile series are produced to meet different performance requirements. For specific product technical performance, please request from Portino sales team, their agent or distributor. The tile designs in each carton are random and may or may not be the same.

Colour Variations: Since the colour reproduction in this printed piece will vary from the actual tile colours, final selection should be made from tile samples. Colour, shade and glaze variations may exist due to the inherent characteristics of porcelain tile.

Due to the low porosity of porcelain tiles, an Improved High Performance Cementitious adhesive in accordance to BS/EN 12004 & ISO 13007-1 is highly recommended for proper installation. Products that meet this standard are available amongst leading adhesive manufacturers. Please seek expert advice from adhesive manufacturers for proper selection and application.

* Refer to test report for specific test result.



Comoro

REFRESHING BEAUTY

SHADE VARIATION



UNIFORM
FROM TILE TO TILE




UNIFORM
FROM TILE TO TILE

The range of colours and tones within the same shade is relatively uniform from tile to tile. There is minimal to no difference among pieces from the same production run.



SLIGHTLY NOTICEABLE
FROM TILE TO TILE




SLIGHTLY NOTICEABLE
FROM TILE TO TILE

The range of colours and tones within the same shade is slightly noticeable from tile to tile. There are clearly distinguishable differences in design texture or pattern with similar or slight change in colour tones.



MODERATELY NOTICEABLE
FROM TILE TO TILE




MODERATELY NOTICEABLE
FROM TILE TO TILE

The range of colours and tones within the same shade is moderately noticeable from tile to tile. There are clearly distinguishable differences in design texture or pattern.



DISTINCTLY NOTICEABLE
FROM TILE TO TILE



DISTINCTLY NOTICEABLE
FROM TILE TO TILE

The range of colours and tones within the same shade is distinctly different from tile to tile. Random colour and design texture differences can be seen from tile to tile. One tile may have totally different colour from another tile. Final installation can be unique.



NIRO CERAMIC GROUP

Lot 2, Persiaran Sultan, Seksyen 15,
40200 Shah Alam, Selangor, Malaysia.
T +603 5033 9333 F +603 5033 9323

www.nirogranite.com

