



LA-BORNE

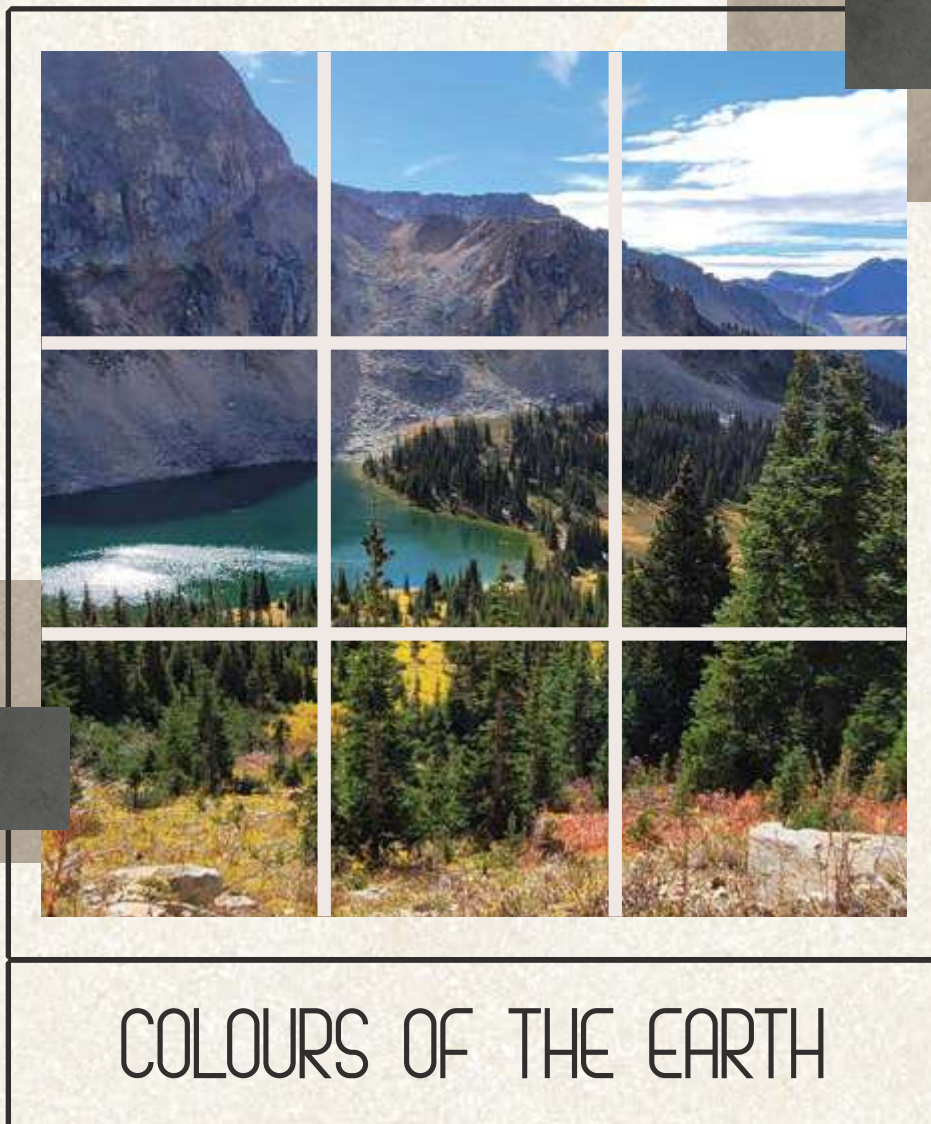

PETE PLN01

Slip-Stop | 60x60cm | 30x60cm

PAOLO PLN02

Slip-Stop | 60x60cm | 30x60cm

PIETRO PLN03

Slip-Stop | 60x60cm | 30x60cm

PAYTON PLN04

Slip-Stop | 60x60cm | 30x60cm

LA-BORNE

COLOURS OF THE EARTH

Born of the essence of the earth, La-Borne by Portino is a collection of tiles that celebrate the varied and wonderful colours of nature, inspired by the unique look of French stones. Portino La-Borne tiles are designed to blend right into natural environments, and come with the Slip-Stop anti-slip infusion that keeps you safe when wet.





PETE

WALL & FLOOR: PLN01
60x60cm . 30x60cm | Slip-Stop



PAOLO

FLOOR: PLN02
60x60cm | Slip-Stop



PIETRO

FLOOR: PLN03
60x60cm | Slip-Stop




PAYTON

FLOOR: PLN04
60x60cm | Slip-Stop





PETE

PLN01 | Slip-Stop | V2
60x60cm | 30x60cm



PAOLO



PLN02 | Slip-Stop | V2
60x60cm | 30x60cm

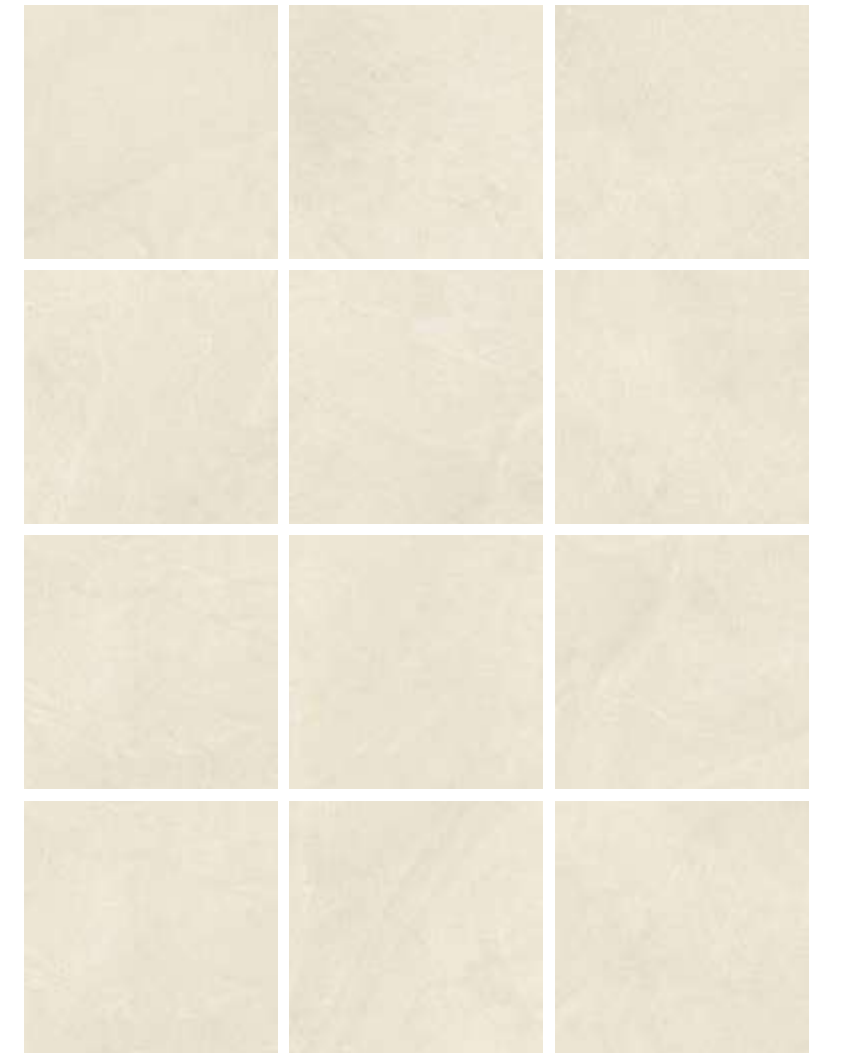




PIETRO

PLN03 | Slip-Stop | V2
60x60cm | 30x60cm

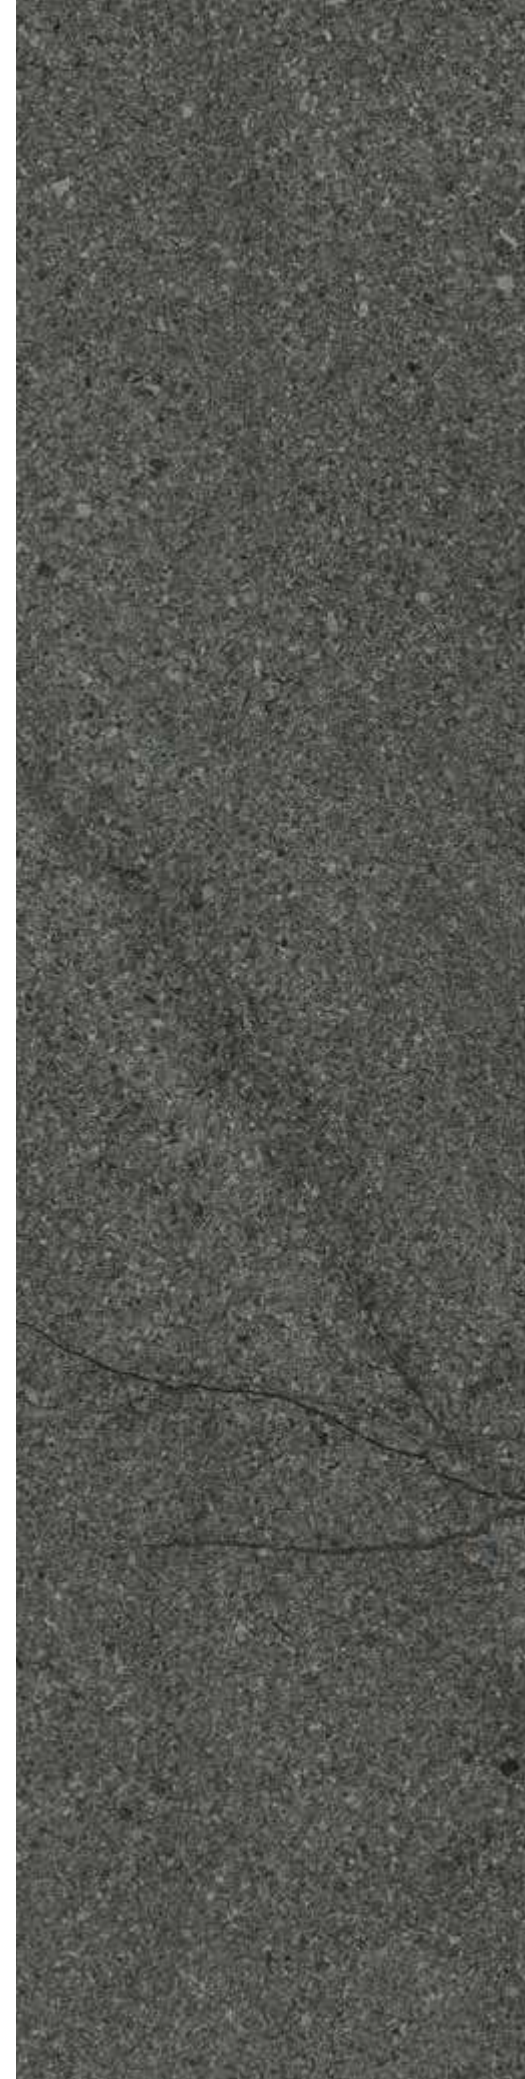

PAYTON

PLN04 | Slip-Stop | V2
60x60cm | 30x60cm



PORTINO TECHNICAL SPECIFICATION

DESCRIPTION	STANDARD TEST	MEASUREMENT UNIT	PORCELAIN (Group Bla)			
			mm	Rectified	mm	Non Rectified
Length & Width	MS ISO 10545-2	mm	±1.0	±0.30%	±2.0	±0.60%
Thickness	MS ISO 10545-2	mm	±0.5	±5.00%	±0.5	±5.00%
Sides Straightness	MS ISO 10545-2	mm	±0.8	±0.30%	±1.5	±0.50%
Rectangularity	MS ISO 10545-2	mm	±1.5	±0.30%	±2.0	±0.50%
Flatness : a) Centre curvature b) Edge curvature c) Warpage	MS ISO 10545-2	mm	±1.8	±0.40%	±2.0	±0.50%
	MS ISO 10545-2	mm	±1.8	±0.40%	±2.0	±0.50%
	MS ISO 10545-2	mm	±1.8	±0.40%	±2.0	±0.50%
Surface Quality	MS ISO 10545-2	One Major Area of Tiles	Min. 95% free from defects			
Water Absorption	MS ISO 10545-3	Mass	Ev ≤ 0.5%			
Breaking Strength : a) Thickness ≥ 7.5mm b) Thickness < 7.5mm	MS ISO 10545-4	N	Not less than 1300N			
	MS ISO 10545-4	N	Not less than 700N			
Modulus of Rupture : a) Thickness ≥ 7.5mm b) Thickness < 7.5mm	MS ISO 10545-4	N/mm ²	Minimum 35			
	MS ISO 10545-4	N/mm ²	Individual Minimum 32			
Abrasion Resistance Surfaces Abrasion for glazed tiles	MS ISO 10545-7	Visual Check	≥ PEI 3 (Dependent on product type)*			
Crazing Test (glazed tiles)	MS ISO 10545-11	Visual Check	Required			
Frost Resistance	MS ISO 10545-12	Visual Check	Required			
Chemical Resistance a) Low concentrations b) Household chemicals and swimming pool salts	MS ISO 10545-13	Visual Check	Manuf. To State			
	MS ISO 10545-13	Visual Check	Minimum B			
Stain Resistance For glazed tiles	MS ISO 10545-14	Visual Check	Minimum class 3			
Slip Resistance	AS/NZS 4586 App.A	Visual Check	Slip-Stop: P4			

* Refer to test report for specific test result.

Each different tile series are produced to meet different performance requirements. For specific product technical performance, please request from Portino sales team, their agent or distributor. The tile designs in each carton are random and may or may not be the same.

Colour Variations: Since the colour reproduction in this printed piece will vary from the actual tile colours, final selection should be made from tile samples. Colour, shade and glaze variations may exist due to the inherent characteristics of porcelain tile.




Due to the low porosity of porcelain tiles, an Improved High Performance Cementitious adhesive in accordance to BS/EN 12004 & ISO 13007-1 is highly recommended for proper installation. Products that meet this standard are available amongst leading adhesive manufacturers. Please seek expert advice from adhesive manufacturers for proper selection and application.

SHADE VARIATION




UNIFORM
FROM TILE TO TILE



UNIFORM
FROM TILE TO TILE
The range of colours and tones within the same shade is relatively uniform from tile to tile. There is minimal to no difference among pieces from the same production run.




SLIGHTLY NOTICEABLE
FROM TILE TO TILE



SLIGHTLY NOTICEABLE
FROM TILE TO TILE
The range of colours and tones within the same shade is slightly noticeable from tile to tile. There are clearly distinguishable differences in design texture or pattern with similar or slight change in colour tones.




MODERATELY NOTICEABLE
FROM TILE TO TILE



MODERATELY NOTICEABLE
FROM TILE TO TILE
The range of colours and tones within the same shade is moderately noticeable from tile to tile. There are clearly distinguishable differences in design texture or pattern.



DISTINCTLY NOTICEABLE
FROM TILE TO TILE



DISTINCTLY NOTICEABLE
FROM TILE TO TILE
The range of colours and tones within the same shade is distinctly different from tile to tile. Random colour and design texture differences can be seen from tile to tile. One tile may have totally different colour from another tile. Final installation can be unique.

LA-BORNE

COLOURS OF THE EARTH

LA-BORNE

COLOURS OF THE EARTH



NIRO CERAMIC GROUP

Lot 2, Persiaran Sultan, Seksyen 15,
40200 Shah Alam, Selangor, Malaysia.
T +603 5033 9333 F +603 5033 9323



facebook
[/nirogranite.niroceramicgroup](#)



instagram
[/Niro_Granite](#)



youtube
[/Niro Granite](#)



pinterest
[/nirogranite](#)



linkedin
[/niro-granite-malaysia](#)

RF20230120